


RA08T – Terminal de reconocimiento facial con detección de temperatura

1. Pantalla de 8 pulgadas
2. Camara Dual. : 200W (RGB);130w (Infrared)
3. Lector Opcional de tarjetas
4. Wireless (2.4G Wi-Fi)
5. Reconocimiento facial simultaneo max 5 personas
6. Desarrollo basado en la nube en Open Source Code
7. Alarma automática por temperatura anormal
8. Precisión promedio de medida +/- 0.5°C
9. Modulo imagen térmica – Infrarojo
10. Avisos sonoros integrados (speaker)
11. Aleta de refrigeración por aire
12. Control de altitud 266.4 mm

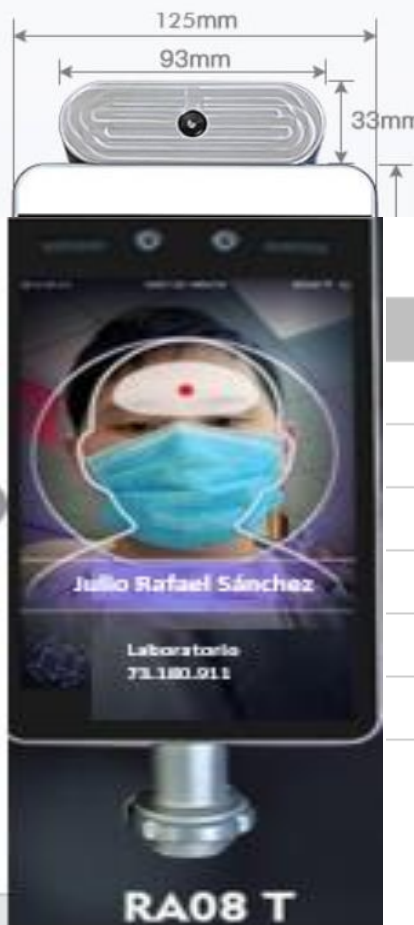

DISPLAY HD

Imágenes más claras y brillantes, con una amplia perspectiva de visualización en alta definición con fácil configuración

General Parameters

Power Supply	DC12V (±10%)
Operating Temperature	-10 ° C ~ 60 ° C
Working Humidity	10% to 90%
Power Consumption	10W MAX
Installation Method	Turnstile, Wall mounted, Desktop, Floor Type
Device Size	234(L)*125(W)*24.5(H)mm
Weight	1.5KG (Device Only)

ESPECIFICACIONES

Screen

Dimension 8 inches screen, full view angle, IPS LCD screen

Resolution 1280×800

Camera

Dual Camera 200W (RGB Camera) ; 130W (Infrared Camera)

Type Wide dynamic camera


Aperture 4mm

Focal Length 0-2m


White Balance Automatic

Wide Dynamic Support

Vertical Wide Angle

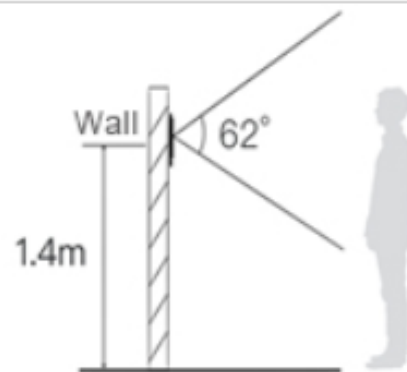

Horizontal Angle

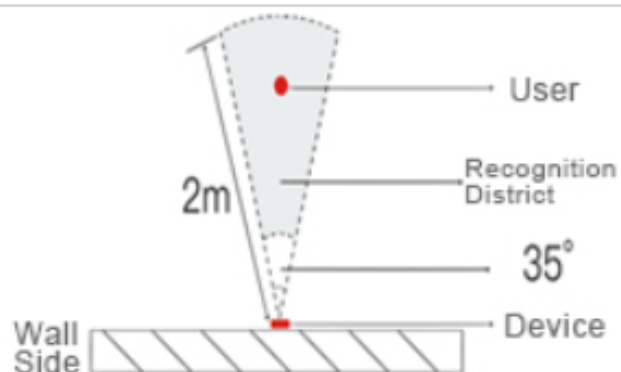

Core Parameter	
CPU	4 cores, 1.8GHz
Memory	2GB RAM, 8GB ROM
Accessories	
Filling Light	LED filling light
Card Reader (Optional)	Ic card reader
Network Module	Support wired, wireless (2.4G Wi-Fi)
Interface	
Audio	1 channel audio output (line out)
Serial Communication Interface	RS232/RS485
USB Interface	USB2.0 interfaces, 1 OTG interface
Relay Output	Only COM and NO
Wiegand Interface	support Wiegand 26/34 input /output
Reset Interface	Yes
RJ45	Yes
Function	
Face Detection	Support detecting and tracking 5 people at the same time
1:N Face Recognition	99.99%
Face Capacity	20,000
1:1 Person Certificate Comparison	More than 99%
Temperature detection	Support
Stranger Detection	Support
Remote Upgrade of Equipment	Support
Recognize Distance	Support
Protection Level	IP64, certain dustproof and waterproof function